COMMERCIAL DATA SHEET Quadra Sparkling 4100 XL



Billi Quadra Sparkling 4100 with XL Levered Dispenser

The Quadra Sparkling is the ultimate in modern design and filtered drinking water appliances delivering instant boiling and chilled filtered water, with the added luxury of sparkling water.

Utilising underbench ice bank technology to enhance capacity and recovery, all three output options are conveniently delivered by operating the DDA compliant position sensitive levers on the single above bench XL levered dispenser.

The Quadra Sparkling has a commercial capacity and is suitable for any environment.







BOILING CHILLED SPARKLING



XL Levered Dispenser

Quadra Sparkling Under-Bench Unit

Features











SAFE TO OPERATE

ECO-INTELLIGENCE TECHNOLOGY

ADJUSTABLE CHILLED **TEMPERATURE**

ADJUSTABLE SPARKLING LEVEL

TECHNOLOGY











PLUS MODEL **AVAILABLE**

FINISHES

HACCP CERTIFIED

ITALO-AUSTRALIAN PARTNERSHIP

Australian Made Boiling Unit * Italian Design & Made Sparkling Unit

PRODUCT SPECIFICATIONS

Billi CO

	Water type	Product code	Model name	Dispenser	Suggested no. of people	Boiling water delivery (cups per hour)*	Chilled & Sparkling water delivery (cups per hour)
BO	DILING CHILLED		Quadra				



906100L

Sparkling 4100

XL Levered

Up to 100

Up to 220

200

1 x 10 1 x 15

Power

supply

(amps)

Based on a set volume of water being drawn every 30 seconds at an inlet temperature of average temperature 21°C. Each cup is equivalent to 170ml. Usage patterns and draw-off methods can

Accessories

992800 - 70mm Riser & Font

992820 - 70mm Riser

992803 - 120mm Riser & Font



992830 - 120mm Riser



990726 - Tubing Extension Kit for Sparkling unit - 2mtrs

Finishes

Standard Finishes

CH - Chrome

BR - Brushed

RG - Rose Gold

Special Order Finishes

BRG - Brushed Rose Gold

GM - Gun Metal Grey

Add the Finish code to the Product Code to finalise your specification. eg. 906100LMB

MB - Matte Black


MW - Matte White

PL - Platinum

TECHNICAL DRAWING & INSTALLATION REQUIREMENTS

PRODUCT DIMENSIONS

20mm 184.5mm 137.5mm bench thickness 1mm-48mm 140mm



WATER SUPPLY

A single 1/2" BSP (15mm) stop-tap with a male thread should be installed in an easily accessible position. Water supply must be microbiologically safe to drink, with a minimum dynamic water pressure of 250kPa and a maximum of 1000kPa.

POWER SUPPLY


A standard 10 amp power outlet plus an additional standard 15 amp outlet are required. Both outlets located no further than 1000mm from the underbench unit. The system is supplied with a 1 metre flex cord and plug.

FILTRATION

Billi's range of premium filters utilise BWT's unique Fibron X technology. Billi's filter range provides superior taste, water quality, consistent filter life and peace of mind when it comes to hygiene. Filter supplied: 994051 (5 micron). Replacement filters available: 994052 (0.2 micron), 994054 (HSD), 994055 (XPHSD), 994056 (Sediment only) and 994060 (0.2 micron sediment only).



PREFERRED INSTALLATION LAYOUT

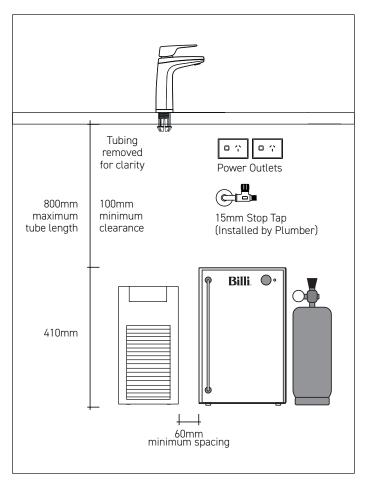

CERTIFICATIONS

Every Billi drinking water appliance is manufactured under a certified quality control system. All Billi commercial range models have been tested and comply with all required standards including: Watermark: WM-022690; Tested to ATS5200.105 and AS/NZ 4020; ISO 9001:2015, QEC 11627; AS1428; HACCP: PE-872-WAT-1-02; WELL Cornerstone Member.

CO₂ Cyclinder

The CO₂ gas cylinder supplied must be secured in a suitable location. Each cylinder contains 1100g of CO₂ and should be installed in a well ventilated area. Each cylinder will provide between 200-350L of sparkling water depending on the unit settings. The MSDS is available on www.billi.com.au for a complete list of specifications and warnings. Replacement gas cylinders are available from Billi. CO₂ Cylinder - single 996911 or double 996912.

WARRANTY

The Billi Quadra Sparkling Range is covered by a comprehensive 2 year warranty on all parts and labour.











Billi Australia Pty Ltd

P 1800 812 321 W www.billi.com.au Billi New Zealand Ltd T/As Merquip

P 0800 636 0 636 W wwww.merquip.co.nz visit us at



